

pure

storage

operation & maintenance manual

locker installation manual

Important - Retain for future reference.

Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product

contents

- 02 Contents
- 03 Safety information
- 04 Positioning and configuration
- 05 Locker runs
- 06 Securing to wall
- 07 Back to back
- 08 Obstruction
- 09 Securing to wall (obstructions)
- 10 Mechanical combination lock - Public
- 11 Mechanical combination lock - Private
- 12 Looking after your locker



safety information

Before you start make sure you have the right tools, plenty of space, and a clean, dry area for installation.

ALWAYS install on a strong, level, and even surface.

ALWAYS ensure the locker base is flush with the floor.

ALWAYS ensure all fixings are secure.

DO NOT use this item if any parts are missing, damaged or worn.

DO NOT use this item unless all fixings are secured.

DO NOT attempt to lift or move lockers unaided.

DO NOT use locker until installation is completed.

NOTE: You must use fixing devices suitable for the type of wall you intend to mount lockers to. Please ensure that the head of any fixing used has a diameter greater than the diameter of the mounting hole in the product and that the fixing is safe and secure before use.

WARNING: Always ensure the area to be drilled is free from hidden electrical wires, water and gas pipes and asbestos.

WARNING: Installation should only be carried out by a competent person. Check the suitability of the wall before fitting.

tools required

SPIRIT LEVEL



RIVET GUN



EQUIPMENT HANDLING



DRILL



2 persons required



ppe (personal protective equipment)

EYE PROTECTION



SAFETY SHOES



SAFETY GLOVES



KNEE/ELBOW PADS



BUMP CAP



positioning and configuration

Due to their narrow height to depth ratio, wherever possible lockers should be secured to ensure stability. Single locker nests should be fixed back to a wall.

Runs of lockers should be fixed together side to side and then fixed back to a wall or back-to-back to another run of lockers.

Lockers mounted on stands or stand seats should be fixed down to the stands/stand seats as well as side to side and back to a wall or other run of lockers.

Check the install location to ensure that the floor surface is strong, level, and even. Do not install lockers on damaged, uneven surfaces.

Clear away any debris in the work area.

Remove packaging from lockers and dispose of in accordance with local authority requirements.

Remove the keys from the underside of the locker base.

Position the locker where it is going to be fitted.

NOTE: **DO NOT** attempt to lift or move lockers by yourself.

configuration



BACK TO WALL



BACK TO BACK



FREE STANDING



made in britain

pure
the future of storage

locker runs

Runs of more than one locker must be fixed together side to side.

Ensure the unit is securely in position and rivet them together side by side.
Use 4x10mm rivet and insert into the 4 attachment locations within the locker side panels.



(Flamezero)
Fire tested and approved

(bioshell)
anti-bacterial coating

(BS 6396:
2008+21:2015)

(BS 4680:
1996)

(CO₂ zero)
carbon zero manufacture

securing to wall

- 1 Using fasteners suitable for the type of wall, fasten each locker to the wall using the holes provided (Fasteners not provided with the locker).

correct installation

- 2 Locker flush with wall and fixed into position using suitable fasteners.



01



02

incorrect installation

- 3 Lockers free standing



03

back-to-back

- 1 Ensure the unit is securely in position and fix together side by side. Use 4x10mm rivets into the locations within the locker back panels and rivet together.

correct installation

- 2 Island of lockers fixed back-to-back and side to side.



01



02



03

incorrect installation

- 3 Island of lockers not fixed back-to-back.


obstructions

Where the positioning of lockers against a wall is impeded by the presence of skirting boards, floor coving or central heating pipes, stands can be used to raise the lockers clear of the obstruction.

The rear leg of the stand can be inset to avoid the obstruction.

Images show examples of locker stands with inset legs to avoid obstructions.

If installing lockers to an obstructed area please refer to page 9.

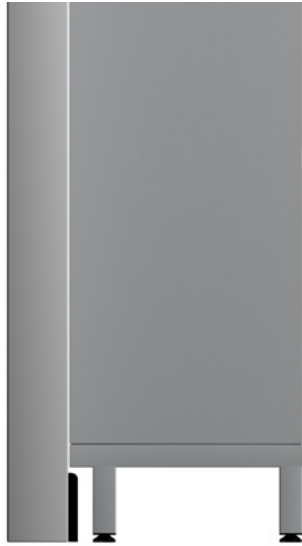

SKIRTING BOARD



FLOOR COVING



PIPEWORK

securing to wall (obstructions)

Wall sited lockers should be fixed back to the wall as well as side to side. Lockers can be fixed directly onto walls or on to wall-fixed timber battens.

Timber battens should be used on irregular wall surfaces or where the lockers are positioned in front of a skirting board, leaving a gap between lockers and wall.

The top batten is used to prevent items falling down the back of the locker. The lower batten is used to secure the locker back to the wall.

correct installation

- 1 Locker based on stand to clear obstruction and fixed directly onto wall.
- 2 Timber batten fixed to wall to provide locker fixing point past any obstruction.



01 Locker stand elevating above obstruction

Batten 260mm from top



02

incorrect installation

- 3 Lockers fixed to wall over obstruction without batten
- 4 Free standing lockers



03



04

mechanical combination lock

NOTE: User mode MUST be specified when ordering locks. Locks cannot be changed between Public and Private mode after purchase.

public mode user instructions

- 1 With the lock in the "open" position, rotate the wheels to select a new user code (diagram 1).
- 2 Turn the handle to the "closed" position (diagram 2).
- 3 Scramble code to secure & check to ensure locked.



Diagram 1




Diagram 2

mechanical combination lock

NOTE: User mode MUST be specified on ordering locks. Locks cannot be changed between Public and Private Mode.

private mode user instructions

- 1 Set a new user code by first selecting current user code (default 2244).
- 2 Turn handle to activate code-change button (see below).
- 3 Press & hold code-change button then rotate individual wheels to select new user code.
- 4 Release code-change button to set user code.
- 5 Close door, lock and scramble code.

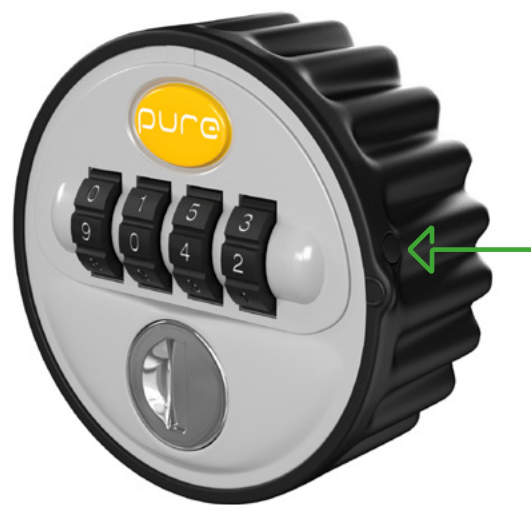

looking after your locker

As the lockers contain moving parts, fixings may occasionally become loose. It is therefore important that all exposed fixings are examined periodically and re tightened where necessary.

Cleaning - standard steel lockers have a high quality paint finish and under normal use, all that is required to keep lockers in good condition is an occasional wipe with a duster or soft cloth with a proprietary spray polish if required. Do not use solvents as this may cause deterioration in the level of protection afforded by the paint finish.

Lockers should be cleaned regularly and checked for signs of wear and damage.

Damaged doors and locks should be replaced as soon as possible as the security of the locker may be compromised. Replacement doors, locks and keys are available on request.

This handbook serves as a product guide to Pure Standard Steel Lockers for use in standard configurations.

The illustrations, descriptions, load data and other information contained in this manual were accepted as correct at the date of publication.

However, Pure reserves the right to make any necessary changes, in line with product development and improvement.

No liability can be accepted for any inaccuracies or omissions, although every reasonable care has been taken to make this publication as complete and accurate as possible.

This publication may not be reprinted, copied, stored in a data processing system or transmitted by electronic, mechanical, photographic or other means, or recorded, translated, edited, abridged or expanded without the written permission of the manufacturer.

The same also applies to extracts from this manual and their use in any other publications.

